


OVERVIEW

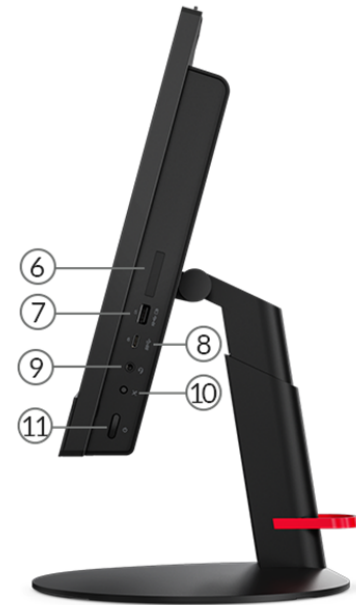

1. Serial *	7. USB 3.1 Gen 2
2. DisplayPort	8. USB-C 3.1 Gen 1
3. 4x USB 3.1 Gen 1	9. Headphone / microphone combo jack (3.5mm)
4. Ethernet (RJ-45)	10. Microphone mute button
5. Power connector	11. Power button
6. Card reader *	

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel Pentium®, 8th Generation Intel Core™ i3 / i5 / i7, or 9th Generation Intel Core i3 / i5 / i7 / i9 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G4900	2	2	3.1GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Celeron G4920	2	2	3.2GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Celeron G4930	2	2	3.2GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Celeron G4950	2	2	3.3GHz	-	2MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5400	2	4	3.7GHz	-	4MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5420	2	4	3.8GHz	-	4MB	DDR4-2400	Intel UHD Graphics 610
Pentium Gold G5500	2	4	3.8GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Pentium Gold G5600	2	4	3.9GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Pentium Gold G5620	2	4	4.0GHz	-	4MB	DDR4-2400	Intel UHD Graphics 630
Core i3-8100	4	4	3.6GHz	-	6MB	DDR4-2400	Intel UHD Graphics 630
Core i3-8300	4	4	3.7GHz	-	8MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9100	4	4	3.6GHz	4.2GHz	6MB	DDR4-2400	Intel UHD Graphics 630
Core i3-9300	4	4	3.7GHz	4.3GHz	8MB	DDR4-2400	Intel UHD Graphics 630
Core i5-8400	6	6	2.8GHz	4.0GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-8500	6	6	3.0GHz	4.1GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-8600	6	6	3.1GHz	4.3GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9400	6	6	2.9GHz	4.1GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9500	6	6	3.0GHz	4.4GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i5-9600	6	6	3.1GHz	4.6GHz	9MB	DDR4-2666	Intel UHD Graphics 630
Core i7-8700	6	12	3.2GHz	4.6GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i7-9700	8	8	3.0GHz	4.7GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i9-9900	8	16	3.1GHz	5.0GHz	16MB	DDR4-2666	Intel UHD Graphics 630

Operating System

Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Ubuntu Linux
- No operating system

Graphics

Graphics^[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 610	Integrated	Shared	1x DP	4096x2304@60Hz(DP)	DirectX® 12
Intel UHD graphics 630	Integrated	Shared	1x DP	4096x2304@60Hz(DP)	DirectX 12

Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

Monitor Support

Monitor Support

Supports up to 2 independent displays via native display and 1 external monitor; supports external monitor via DisplayPort™

Chipset

Chipset

Intel B360 chipset

Memory

Max Memory^[1]

Up to 32GB DDR4-2666

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type

DDR4-2666

Memory Protection

Non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support

Up to two drives, 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB
- M.2 SSD up to 1TB
- Optional Intel Optane™ Memory, M.2

Storage Type

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	5.4K	-
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
2.5" SATA SSD	SATA 6Gb/s	-	Opal
2.5" SATA SSD	SATA 6Gb/s	-	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
Intel Optane Memory M10	PCIe NVMe, PCIe 3.0 x2	-	-

RAID

No support

Removable Storage

Optical

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- None

Card Reader

- 3-in-1 card reader
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC233 codec

Speakers

Stereo speakers, 2W x2

Microphone

Dual array microphone

Camera

- 1080p, LED indicator, with physical switch on/off, supports multi-degree rotation (horizontal 0° to 180°, vertical -25° to 25°)
- No camera

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
150W	Adapter	90%	-

DESIGN

Display

Display¹⁾

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
21.5"	FHD (1920x1080)	None	IPS	250 nits	Anti-glare	16:9	1000:1	-	horizontal: +/- 89°, vertical: +/- 89°	Borderless design, support low blue light mode
21.5"	FHD (1920x1080)	Multi-touch	IPS	250 nits	Anti-glare	16:9	1000:1	-	horizontal: +/- 89°, vertical: +/- 89°	Borderless design, support low blue light mode

Touchscreen

- Advanced In-cell Touch (AIT), supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

Mouse

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

Mechanical

Buttons

- Power button
- Microphone mute button

Form Factor

AIO (21.5 inches)

Dimensions (WxDxH)¹⁾

Models	Dimensions
Models with full function monitor stand and no camera	491 x 252 x 377-486 mm (19.3 x 9.9 x 14.8-19.1 inches)

Models with UltraFlex III stand and no camera	491 x 252 x 335-417 mm (19.3 x 9.9 x 13.2-16.4 inches)
Models without stand and camera	491 x 49 x 321 mm (19.3 x 1.9 x 12.6 inches)

Weight

Models	Weight
Non-touch models with full function monitor stand and no camera	7.18 kg (15.8 lbs)
Non-touch models with UltraFlex III stand and no camera	7.65 kg (16.9 lbs)
Non-touch models without stand and camera	5.05 kg (11.1 lbs)
Touch models with full function monitor stand and no camera	7.38 kg (16.3 lbs)
Touch models with UltraFlex III stand and no camera	7.85 kg (17.3 lbs)
Touch models without stand and camera	5.25 kg (11.6 lbs)

Case Color

Black

Bays

- 1x 2.5" disk bay
- 1x slim ODD bay

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

EOU

Toolless chassis open and toolless disk, memory, stand assembly / removal

Stand

- Full function monitor stand, supports -5° to +45° tilt, left & right 45° swivel, up to 110mm lift
- UltraFlex III stand, supports -5° to +70° tilt, left & right 45° swivel, up to 136mm lift (flat mode) / up to 82mm lift (vertical mode)
- No stand

Mounting

Supports VESA mount 100mm

Notes:

1. Camera adds 22mm in height (Vertical)

CONNECTIVITY**Network****Onboard Ethernet**

Gigabit Ethernet, Realtek RTL8111G, 1x RJ45, supports Wake-on-LAN

Optional Ethernet

No optional Ethernet

WLAN + Bluetooth®

- Realtek RTL8821CE, 802.11ac Dual Band 1x1 Wi-Fi® + Bluetooth 4.2, M.2 card
- Realtek RTL8822BE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 card
- Intel Dual Band Wireless-AC 3165, 802.11ac Dual Band 1x1 Wi-Fi + Bluetooth 4.2, M.2 Card
- Intel Dual Band Wireless-AC 8265, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 4.2, M.2 Card
- No WLAN and Bluetooth

Ports^[1]**Rear Ports^[2]**

- 4x USB 3.1 Gen 1 (one supports Smart Power On)
- 1x DisplayPort
- 1x Ethernet (RJ-45)

Optional Rear Ports

1x serial

Right Ports

- 1x USB 3.1 Gen 2 (Always On and fast charge)
- 1x USB-C 3.1 Gen 1
- 1x headphone / microphone combo jack (3.5mm)

Optional Right Ports

1x card reader

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

Monitor Cable**Monitor Cable**

- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI® 1.4 dongle
- DP to VGA dongle
- No monitor cable

SECURITY & PRIVACY**Security****Security Chip**

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY**System Management****System Management**

None

SERVICE

Warranty

Base Warranty

- 1-year depot service
- 1-year limited onsite service
- 3-year depot service
- 3-year limited onsite service
- 3-year split limited onsite service
- No base warranty

ENVIRONMENTAL

Operating Environment

Temperature

- Storage: -20°C (-4°F) to 60°C (140°F)
- Storage: -40°C (-40°F) to 60°C (140°F)
- Operating: 5°C (41°F) to 35°C (95°F)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Silver (not for Celeron / Pentium/ non-OS models)
- ENERGY STAR® 8.0 (not for Celeron / Pentium/ non-OS models)
- ErP Lot 3
- GREENGUARD®
- TCO
- RoHS compliant

Other Certifications

Other Certifications

- TÜV Rheinland Eye Comfort Certification
- TÜV Rheinland Low Blue Light
- (Optional) TÜV Rheinland Ultra Low Noise

Mil-Spec Test

MIL-STD-810G military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus)

